


Open Your Box

- ☒ RS35 Mobile Computer
- ☒ AC Adapter (Optional)
- ☒ Hand Strap
- ☒ Snap-on Charging & Communication Cable (Optional)
- ☒ Quick Start Guide

Overview

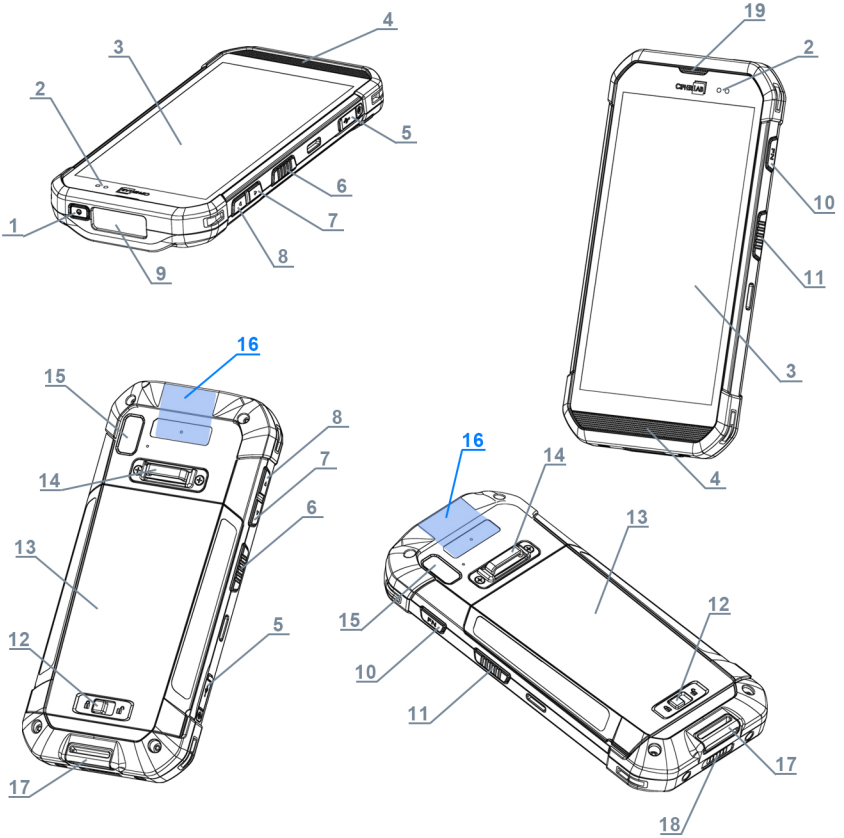

1. Power Button
2. Status LED
3. Touchscreen
4. Microphone & Speaker
5. USB-C Port with Cover
6. Side-Trigger (Left)
7. Volume Down Button
8. Volume Up Button
9. Scan Window
10. Function Key
11. Side-Trigger (Right)
12. Battery Cover Latch
13. Battery with Battery Cover
14. Hand Strap Cover
15. Camera
16. NFC Detection Area
17. Hand Strap Hole
18. Charging & Communication Pins
19. Receiver

Important Charging Information	
Power Supply	Input: AC 100-240 V, 50/60 Hz Output: DC 5V, 2A CipherLab approved
Battery Pack	3.85V, 4000mAh rechargeable Li-polymer battery CipherLab proprietary
Charging Time	Approx. 4 hours via adapter


The Regulatory label can be found in your device from the path below:
Settings → About phone → Regulatory label

Install & Remove Battery

Please follow the steps to install and remove the main battery.

Step 1:


Insert a fully-charged main battery into the grooves from the battery top, and then press down the lower edge of the battery.

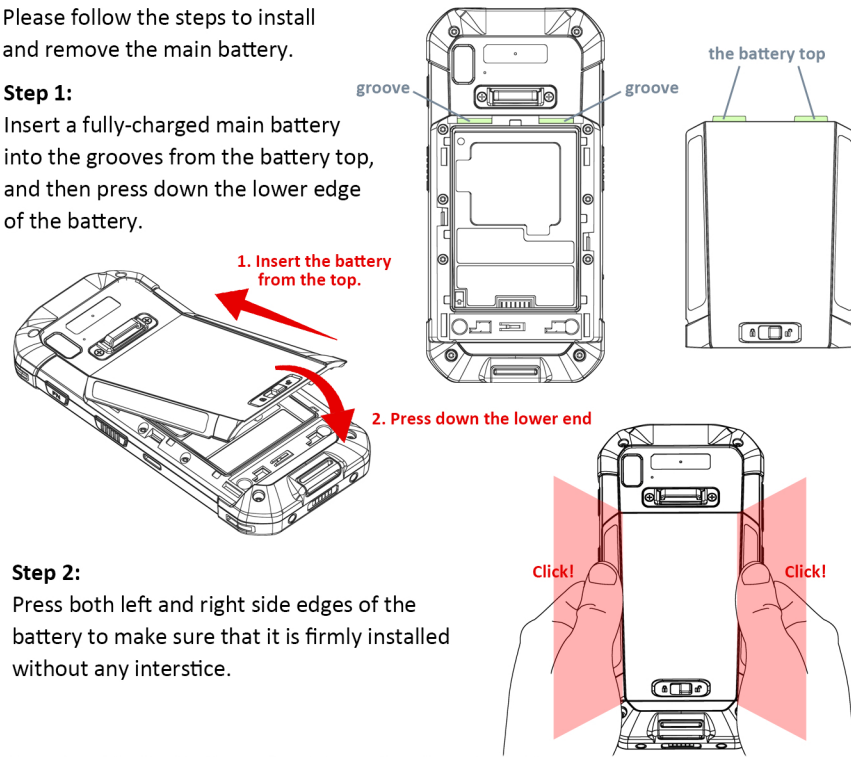

Step 2:

Press both left and right side edges of the battery to make sure that it is firmly installed without any interstice.

Step 3: Slide the battery latch leftward to "Lock" position.

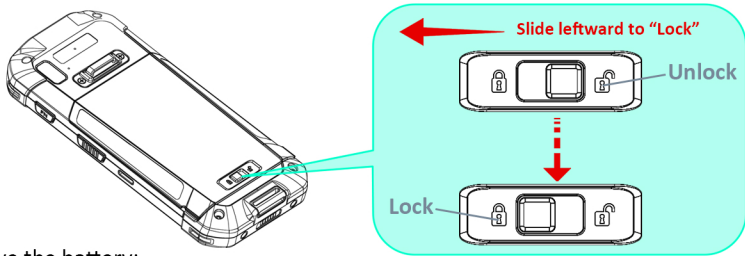


To remove the battery:

Step 1: Slide the battery latch rightward to unlock it.




Step 2:

Once the battery cover is unlocked, it slightly tilts up and is ready to be removed. By holding the two sides of the battery cover, lift up the main battery (which is with the battery cover) from its lower end to remove it.

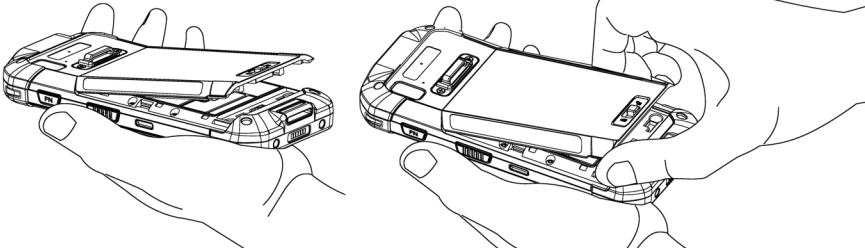


Install SIM, SAM, & SD Cards

Step 1: Remove the battery (with cover), and lift up the inner lid that protects the card sockets chamber by holding the pull tab.

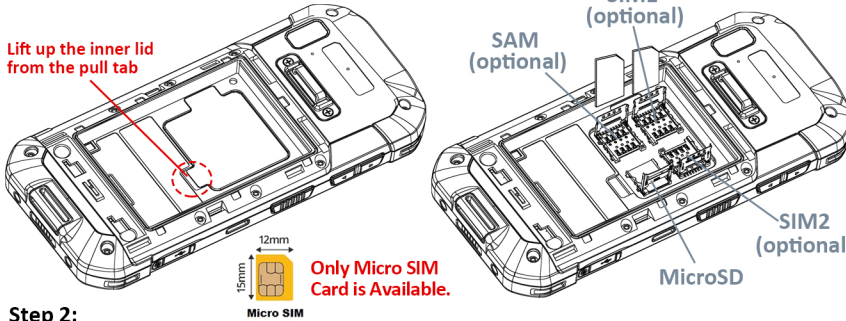

Step 2:

After the chamber is revealed, insert SIM cards, the SAM card and the microSD card into their respective sockets. Close and push back the hinged cover till a click sounds.

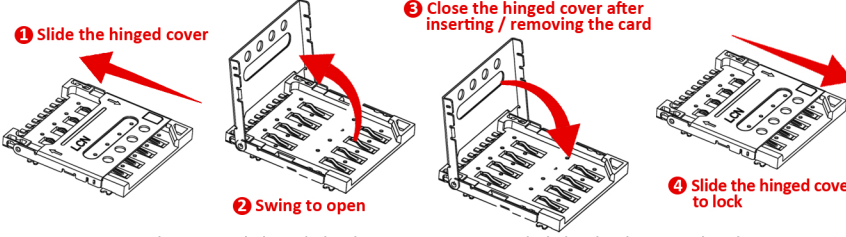


Step 3: Mount the inner lid and the battery cover, and slide the battery latch back to the "Lock" position

Charging & Communication

By USB Type-C Cable:

Insert a USB Type-C cable into its port on the right side of the RS35 mobile computer. Connect the USB plug to the approved adapter for external power connection, or plug it to your PC/Laptop for charging or data transmission.

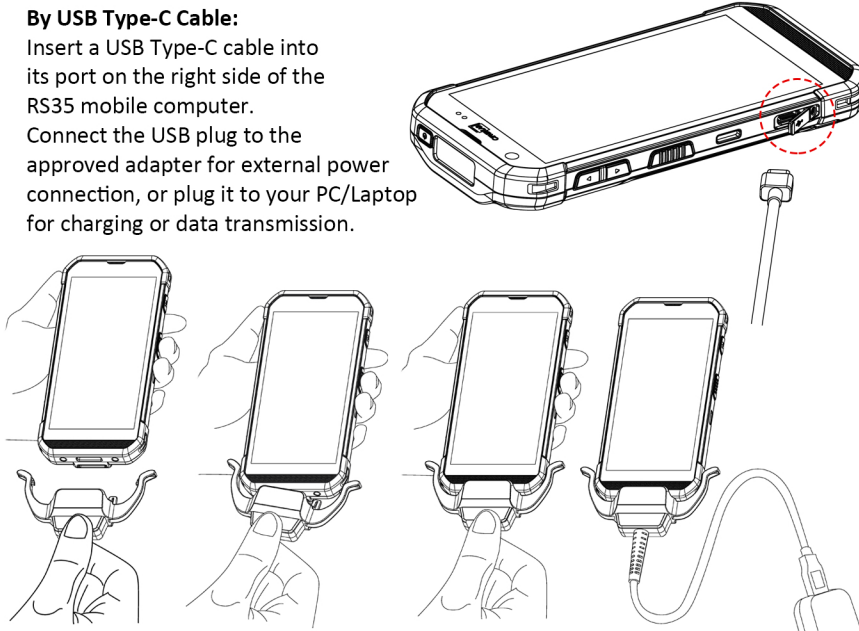

By Snap-on Charging & Communication cable:

Hold the snap-on cup toward the bottom of the RS35 mobile computer, and push the snap-on cup upwards to make it attach to the RS35 mobile computer. Connect the USB plug to the approved adapter for external power connection, or plug it to the USB port of PC/laptop for charging/ data transmission.

檢視包裝內容物／检视包装内容物

- ☑ RS35 行動電腦／RS35 行动电脑


☑ 電源轉換器 (選配)／电源适配器 (选配)

☑ 手背帶／手背带

☑ 卡扣式傳輸充電線 (選配)／卡扣式传输充电线 (选配)

☑ 快速使用指南／快速使用指南

概覽／概览

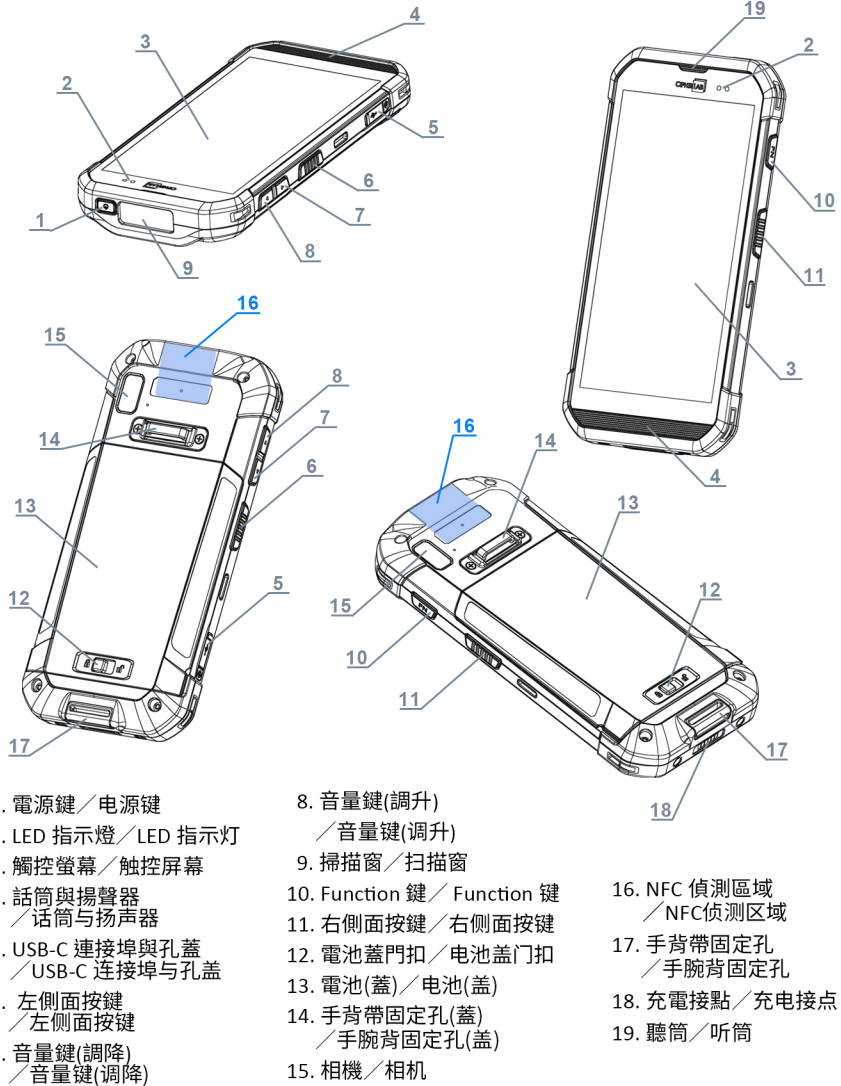


重要電源資訊／重要电源信息	
電源轉換器 电源适配器	輸入／输入：AC 100-240 V, 50/60 Hz 輸出／输出：DC 5V, 2A CipherLab 專用電源供應器／CipherLab 专用电源供应器
電池容量／电池容量	3.85V, 4000mAh, CipherLab 專用充電式鋰聚合物電池 3.85V, 4000mAh, CipherLab 专用充电式锂聚合物电池
充電時間／充电时间	以電源轉換器充電約4小時／以电源适配器充电约4小时



認證資訊請詳見：設定 → 關於手機 → 法規標籤

電池安裝與拆卸／电池安装与拆卸

請依步驟指示拆卸並安裝主電池：
请依步骤指示拆卸并安装主电池：

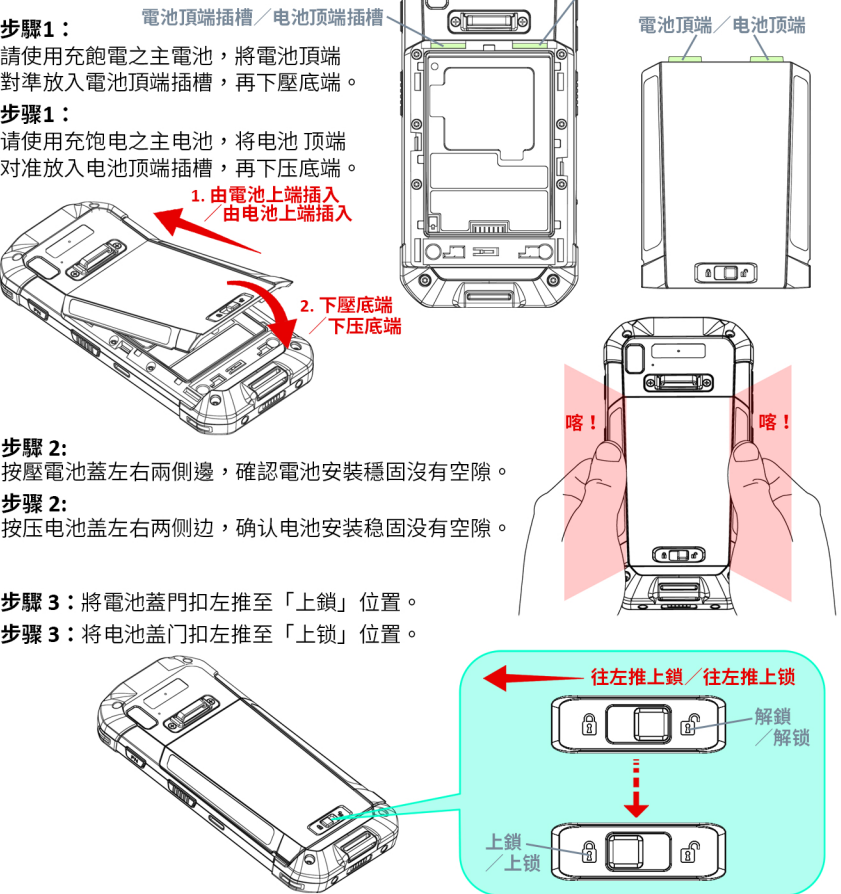


請依下述步驟移除主電池。／请依下述步骤移除主电池。

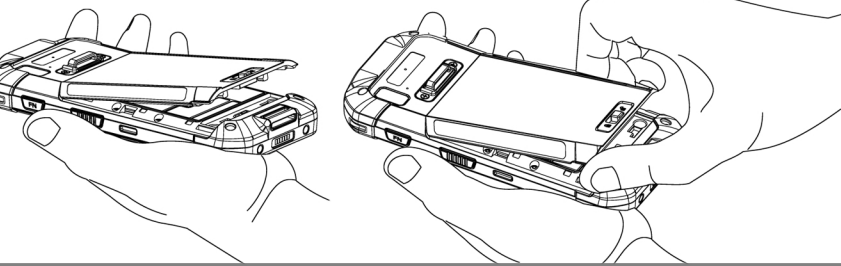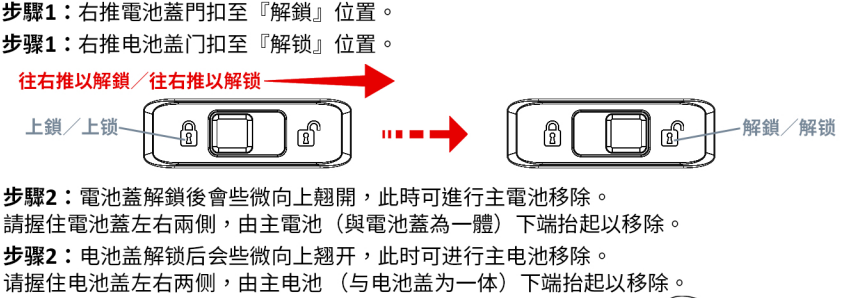

安裝／安装 SIM 卡、SAM 卡、SD 卡


步驟1：卸除電池(蓋)後，自拉耳處向上拉起以掀開卡槽保護內蓋。
步骤1：卸除电池(盖)后，自拉耳处向上拉起以掀开卡槽保护内盖。

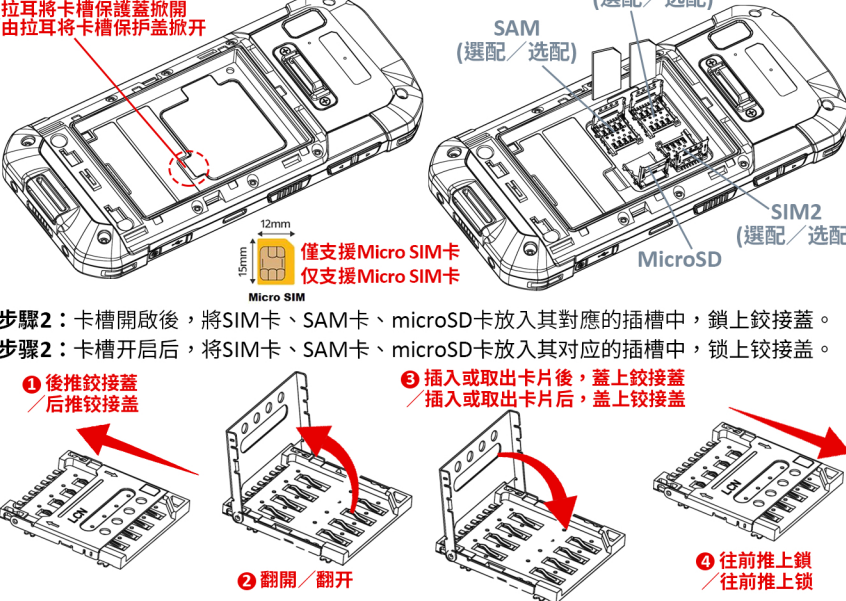

步驟3：蓋回內蓋、裝上電池，將電池蓋門扣推至『上鎖』位置。
步骤3：盖回内盖、装上电池，将电池盖门扣推至『上锁』位置。

充電與傳輸／充电与传输

透過 USB Type-C 線：將 USB Type-C 線插入 RS35 行動電腦右側的 USB Type-C 埠。而 USB Type-C 線另一端的 USB 插頭接上電源轉換器，進行外部電源連接；或連接至電腦進行充電／傳輸。
透过 USB Type-C 线：将 USB Type-C 线插入 RS35 行动电脑右侧的 USB Type-C 埠。而 USB Type-C 线另一端的 USB 插头上接电源转换器，进行外部电源连接；或连接至电脑进行充电／传输。

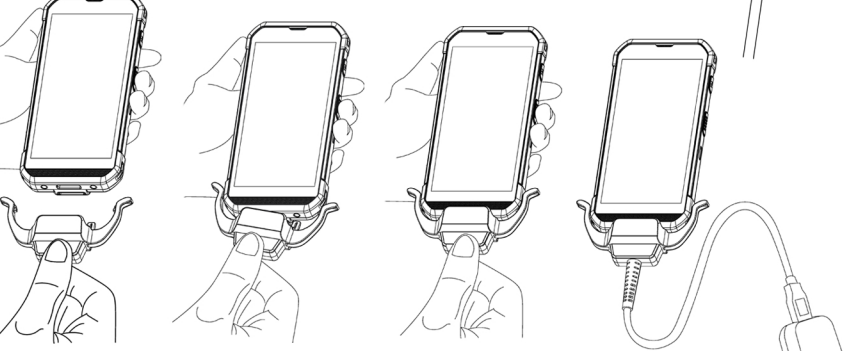

透過卡扣式傳輸充電線：將傳輸充電槽對準 RS35 行動電腦底部，上推傳輸充電槽，使其與 RS35 行動電腦接合。將 USB 插頭接上電源轉換器，進行外部電源連接；或插入電腦的 USB 埠進行資料傳輸／充電。
透过卡扣式传输充电线：将传输充电槽对准 RS35 行动电脑底部，上推传输充电槽，使其与 RS35 行动电脑接合。将 USB 插头上接电源转换器，进行外部电源连接；或插入电脑的 USB 埠进行文件传输／充电。