




**ZEBRA**

# Zebra ZBR4000 Inlay

## FEATURES

- Extreme high sensitivity: read range up to 20m in free space
- Optimized to be read from nearly any angle
- Performs well when placed on or near challenging materials (i.e. pallets, freight)
- Best in class read accuracy with Zebra ATR7000
- Pre-tested with Zebra printers and readers
- Applications: Case / Pallet, Freight, Assets
- Global item – works with FCC and ETSI frequencies

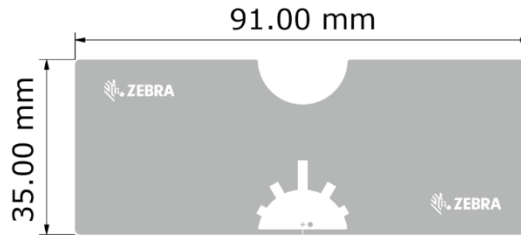

## SUGGESTED APPLICATIONS

- RFID labeling



- Case/pallet labeling



- Transportation & Logistics



- Warehouse labeling



## ADDITIONAL DETAILS

- IC: NXP UCODE 8
- Read Sensitivity: -23dBm
- Write Sensitivity: -18dBm
- EPC memory: 128 bit
- User memory: N/A
- TID: 96 bit factory locked (48 bit unique)
- EPC Gen2v2

## TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
25° F (-4° C)	-40°F to 185°F (-40°C to 85°C)	72° F (22° C) at 50% RH

### Expected Exterior Life

Dependent on facestock and adhesive selected.

For more information, visit [www.zebra.com/supplies](http://www.zebra.com/supplies)

**Product Performance and Suitability:** The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com

©2016 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. 09/2016